


mm inch

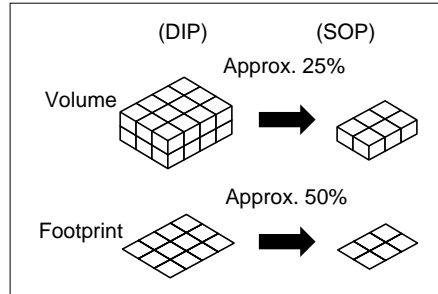

toMOS relay has only 30 pA even with the rated load voltage of 80 V (AQV225NS).

#### 4. Controls low-level analog signals

PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

#### 5. Tape and reel

The device comes standard in a tape and reel (1,000 pcs./reel) to facilitate automatic insertion machines.

## FEATURES

### 1. 1-channel (Form A) in super miniature design

The device comes in a super-miniature SO package measuring (W) 4.4 × (L) 6.3 × (H) 2.1 mm (W).173 × (L).248 × (H).083 inch —approx. 25% of the volume and 50% of the footprint size of DIP type PhotoMOS Relays.

### 2. Low capacitance between output terminals ensure high response speed:

The capacitance between output terminals is small, typically 10 pF. This enables for a fast operation speed of 200 μs.

### 3. Low-level off state leakage current:

The SSR has an off state leakage current of several milliamperes, whereas the Pho-

## TYPICAL APPLICATIONS

- Telephones
- Measuring instruments
- Computer
- Industrial robots
- High-speed inspection machines

## TYPES

### 1. AC/DC type

Output rating*		Part No.		Packing quantity in tape and reel
Load voltage	Load current	Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side	
80 V	120 mA	1 Form A AQV225NSX	1 Form A AQV225NSZ	1,000 pcs.
200 V	50 mA	AQV227NSX	AQV227NSZ	
400 V	40 mA	AQV224NSX	AQV224NSZ	

\*Indicate the peak AC and DC values.

Notes: (1) Tape package is the standard packing style. Also available in tube. (Part No. suffix "X" or "Z" is not needed when ordering; Tube: 75 pcs.; Case: 1,500 pcs.)

(2) For space reasons, the top two letters of the product number "AQ" are omitted on the product seal. The package type indicator "X" and "Z" are also omitted from the seal. (Ex. the label for product number AQV224NS is V224NS).

## RATING

### 1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV225NS	AQV227NS	AQV224NS	Remarks	
Input	LED forward current	I <sub>F</sub>		50 mA			f = 100 Hz, Duty factor = 0.1%	
	LED reverse voltage	V <sub>R</sub>		3 V				
	Peak forward current	I <sub>FP</sub>		1 A				
	Power dissipation	P <sub>in</sub>		75 mW				
Output	Load voltage (peak AC)	V <sub>L</sub>		80 V	200 V	400 V	A connection: Peak AC, DC B, C connection: DC	
	Continuous load current	I <sub>L</sub>		A	0.12 A	0.05 A		0.04 A
				B	0.15 A	0.06 A		0.05 A
				C	0.25 A	0.08 A		0.06 A
	Peak load current	I <sub>peak</sub>			0.36 A	0.15 A		0.12 A
Power dissipation	P <sub>out</sub>	450 mW						
Total power dissipation		P <sub>T</sub>		500 mW				
I/O isolation voltage		V <sub>iso</sub>		1,500 V AC				
Temperature limits	Operating	T <sub>opr</sub>		-40°C to +85°C -40°F to +185°F			Non-condensing at low temperatures	
	Storage	T <sub>stg</sub>		-40°C to +100°C -40°F to +212°F				


2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	Type of connection	AQV225NS	AQV227NS	AQV224NS	Remarks
Input	LED operate current	Typical	I <sub>Fon</sub>	—	0.7 mA			I <sub>L</sub> = Max.
		Maximum			3 mA			
	LED turn off current	Minimum	I <sub>Foff</sub>	—	0.4 mA			I <sub>L</sub> = Max.
		Typical			0.65 mA			
	LED dropout voltage	Typical	V <sub>F</sub>	—	1.14 V (1.25 V at I <sub>F</sub> = 50 mA)			I <sub>F</sub> = 5 mA
		Maximum			1.5 V			
Output	On resistance	Typical	R <sub>on</sub>	A	7.0 Ω	30 Ω	70 Ω	I <sub>F</sub> = 5 mA I <sub>L</sub> = Max. Within 1 s on time
		Maximum			10.0 Ω	50 Ω	100 Ω	
		Typical	R <sub>on</sub>	B	3.5 Ω	16 Ω	55 Ω	I <sub>F</sub> = 5 mA I <sub>L</sub> = Max. Within 1 s on time
		Maximum			5.0 Ω	25 Ω	70 Ω	
		Typical	R <sub>on</sub>	C	1.8 Ω	8 Ω	28 Ω	I <sub>F</sub> = 5 mA I <sub>L</sub> = Max. Within 1 s on time
		Maximum			2.5 Ω	12.5 Ω	35 Ω	
	Output capacitance	Typical	C <sub>out</sub>	—	10 pF			I <sub>F</sub> = 0 V <sub>B</sub> = 0 f = 1 MHz
		Maximum			15 pF			
	Off state leakage current	Typical	I <sub>leak</sub>	—	30 pA	30 pA	90 pA	I <sub>F</sub> = 0 V <sub>L</sub> = Max.
		Maximum			10 nA			
Transfer characteristics	Turn on time*	Typical	T <sub>on</sub>	—	0.25 ms			I <sub>F</sub> = 5 mA I <sub>L</sub> = Max.
		Maximum			0.5 ms			
	Turn off time*	Typical	T <sub>off</sub>	—	0.08 ms			I <sub>F</sub> = 5 mA I <sub>L</sub> = Max.
		Maximum			0.2 ms			
	I/O capacitance	Typical	C <sub>iso</sub>	—	0.8 pF			f = 1 MHz V <sub>B</sub> = 0
		Maximum			1.5 pF			
Initial I/O isolation resistance	Minimum	R <sub>iso</sub>	—	1,000 MΩ			500 V DC	

Note: Recommendable LED forward current I<sub>F</sub> = 5 mA.

For type of connection, see Page 444.

\*Turn on/Turn off time

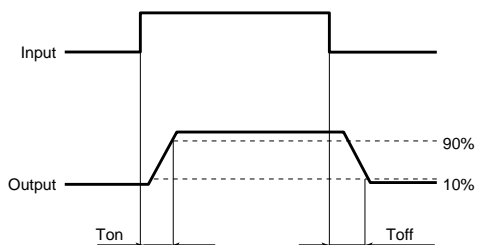


- For Dimensions, see Page 441.
- For Schematic and Wiring Diagrams, see Page 444.
- For Cautions for Use, see Page 449.

REFERENCE DATA

1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40°C to +85°C  
-40°F to +185°F

Type of connection: A

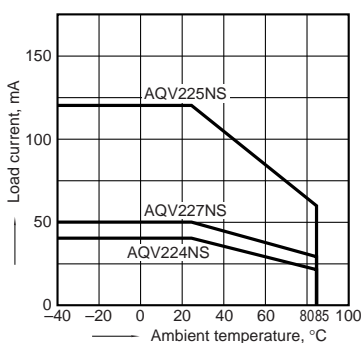


2.-(1) On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;  
LED current: 5 mA;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

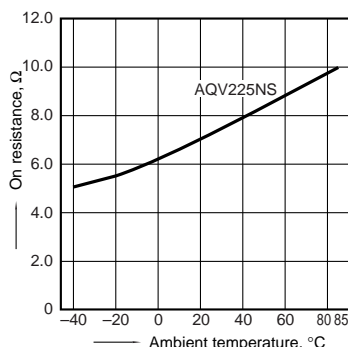

2.-(2) On resistance vs. ambient temperature characteristics


Measured portion: between terminals 4 and 6;  
LED current: 5 mA;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

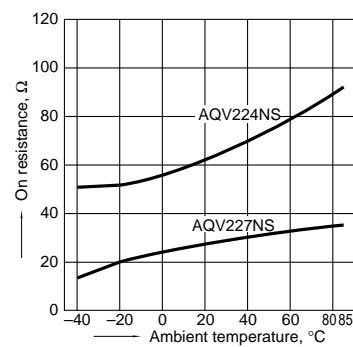

# AQV220NS


## 3. Turn on time vs. ambient temperature characteristics

LED current: 5 mA;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

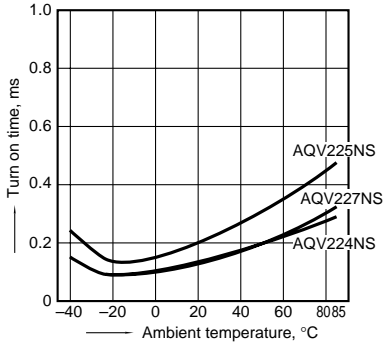


## 4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

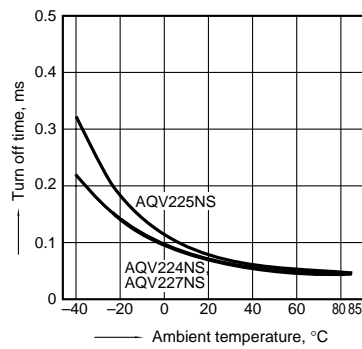


## 5. LED operate current vs. ambient temperature characteristics

Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

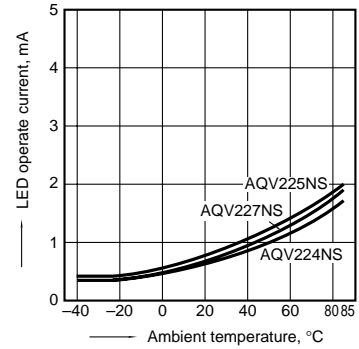


## 6. LED turn off current vs. ambient temperature characteristics

Load voltage: Max. (DC);  
Continuous load current: Max. (DC)




## 7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types;  
LED current: 5 to 50 mA

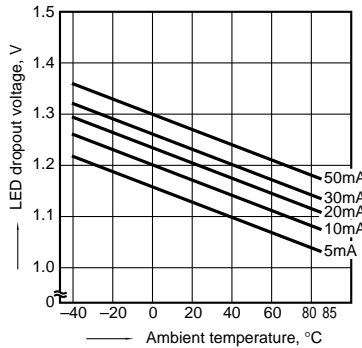


## 8. Voltage vs. current characteristics of output at MOS portion

Measured portion: between terminals 5 and 6,  
7 and 8;  
Ambient temperature: 25°C 77°F




## 9. Off state leakage current

Measured portion: between terminals 4 and 6;  
Ambient temperature: 25°C 77°F

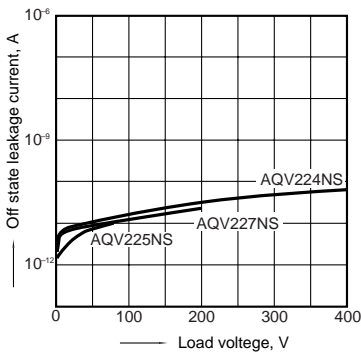


## 10. LED forward current vs. turn on time characteristics

Measured portion: between terminals 4 and 6;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC);  
Ambient temperature: 25°C 77°F

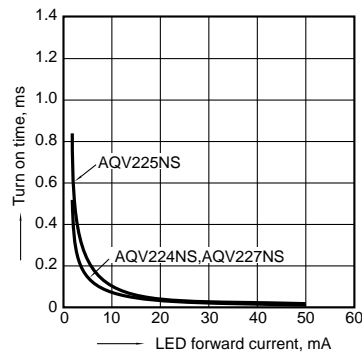


## 11. LED forward current vs. turn off time characteristics

Measured portion: between terminals 4 and 6;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC);  
Ambient temperature: 25°C 77°F

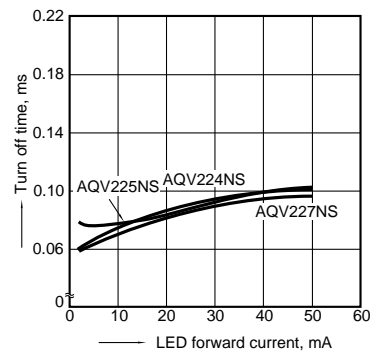


## 12. Applied voltage vs. output capacitance characteristics

Measured portion: between terminals 4 and 6;  
Frequency: 1 MHz, 30 mVrms;  
Ambient temperature: 25°C 77°F



## 13. Isolation characteristics (50 Ω impedance)

Measured portion: between terminals 4 and 6;  
Ambient temperature: 25°C 77°F

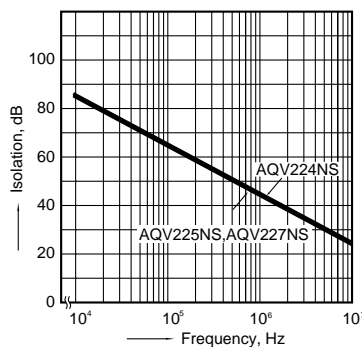

## 14. Insertion loss characteristics (50 Ω impedance)

Measured portion: between terminals 4 and 6;  
Ambient temperature: 25°C 77°F

